



Bobcat®

S250
==



Performance

	S250	S250H
Rated operating capacity		1200 kg
Tipping load		2400 kg
Hydraulic pump capacity	78.4 l/min	116.2 l/min
Travel speed		11.6 km/h
Two-Speed Option	- Low Range - High Range	11.6 km/h 20.1 km/h

Engine

Make/Model	Kubota V3300-DI-T
Fuel/Cooling	Diesel / Water
Power at rated RPM (ISO 9249 EEC)	53 kW (71 HP) at 2400 RPM
Engine power class	61 kW (83 HP)
Number of cylinders	4
Displacement	3.32 l
Fuel tank capacity	94.6 l

Weight

Operating weight ^①	3503 kg
-------------------------------	---------

Operation

Steering and drive	Forward, reverse, travel speed and steering controlled by two hand levers
Hydraulics	Raise/lower lift arms and dump/rollback bucket controlled by two foot pedals or optional hand controls.
Transmission	Hydrostatic four-wheel drive

Standard features

- Automatically activated glow plugs
- Bob-Tach
- Bobcat Interlock Control System (BICS™)
- EC Certification
- Front auxiliary hydraulics
- Horn
- Hydraulic bucket positioning ^④
- Lift arm support
- Meters/gauges/warning lights/engine shutdown
- Operating lights (front & rear)
- Operator cab ^② (ROPS/FOPS 1)
- Parking brake
- Seat bar
- Seat belt
- Spark arrestor muffler
- Suspension seat (vinyl cover)
- Top, rear and side windows
- 12 - 16.5, 10 ply Bobcat heavy duty flotation tyres

Optional features

- Advanced Hand Controls (AHC)
- Attachment control kit
- Backup alarm
- Cab door
- Catalytic purifier
- Deluxe instrumentation with keyless start system
- Flasher/strobe lights
- Fresh air heater
- Lift kit
- Operator cab ^③ (FOPS 2)
- Rear auxiliary hydraulics
- Special application kit ^⑤
- Suspension seat (cloth cover)
- 12 x 16.5 segmented flotation tyres
- 31 x 15.5 x 15 super flotation tyres
- 8.25 x 15 segmented industrial tyres
- 8.25 x 15.5 6 ply narrow tyres

- ① Machine with Bobcat tyres, bucket, fuel tank full and operator
 ② Top and rear window, semi rear side windows
 ③ Get more info from your dealer

- ④ Bucket positioning helps operator keep the same tilt of the load during lifting.
 ⑤ This includes lexan front door, top and rear windows.

Attachments available

Angle blade	Pallet forks
Angle broom [ⓑ]	Planer [ⓐ]
Auger	Rear stabilizer
Backhoe	Rotary cutter Brushcat
Box Blade	Scarifier
Brush cutter	Scraper
Buckets	Silage cutter
Chipper [Ⓒ]	Snow blower [Ⓒ]
Combination bucket	Sod layer
Concrete pump [Ⓒ]	Soil conditioner
Cuttercrusher	Spreader [Ⓒ]
Digger	Stump grinder [Ⓒ]
Disk harrow	Sweeper [ⓑ]
Dozer blade [Ⓒ]	Three point hitch
Dumper	Tiller
Ejector bucket	Tilt-Tatch
Feeding bucket	Tracks
Grader	Tretransplanter [Ⓒ]
Grapples & forks	Trench compactor
Hydraulic breaker [Ⓐ]	Trencher [Ⓒ]
Industrial grapple	Vibratory roller [ⓑ]
Landplane	Wheel Saw [Ⓒ]
Landscape rake	Whisker push broom
Mixing bucket [Ⓒ]	



Ⓐ When operating the Bobcat loader with this attachment, a special application kit must be used.

ⓑ Optional water kit

Ⓒ Attachment control kit required

Dimensions

- All dimensions are in mm.
- Loader equipped with 12 x 16.5 tyres and low profile bucket

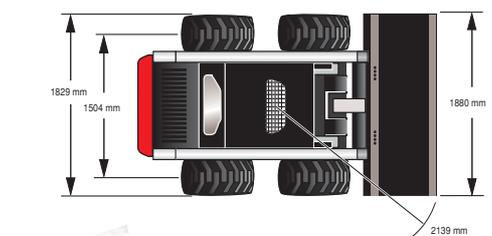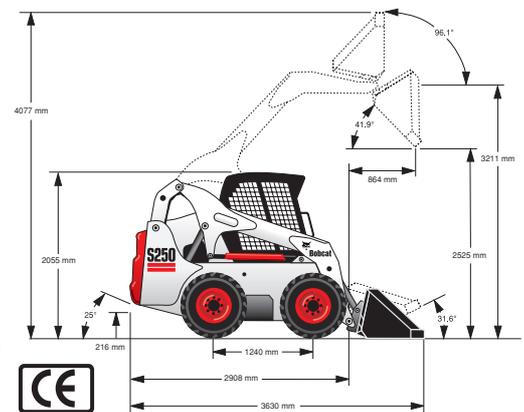

BOBCAT EUROPE

J. Huysmanslaan, 59 - B - 1651 LOT Belgium
 ☎ +32 (0)2 371 68 11 - Fax +32 (0)2 371 69 01

E-mail: Bobcat_europe@bobcat.com

http: www.bobcat.com