

FIAT-HITACHI

COMPACT LINE



NET FLYWHEEL POWER

19 kW / 26 HP

OPERATING WEIGHT (max)

3250 Kg

BUCKET CAPACITY

0.055 - 0.13 m³

EX32U

MAIN DATA

Net flywheel power (SAE J 1349)	19 kW / 26 HP
Net flywheel power (DIN 6271).....	19 kW
Net flywheel power (ISO 9249).....	19 kW
Net flywheel power (CEE 80/1269).....	19 kW
Rated engine speed	2200 rpm
Operating weight (with rubber shoes):	
- with canopy	3120 kg
- with cab	3250 kg
Maximum digging depth	2850 mm
Transport length	4470 mm
Transport width	1550 mm
Transport height:	
- with canopy	2530 mm
- with cab	2650 mm

ENGINE


Make	ISUZU
Model	3LD1
Type.....	4 cycle, diesel
Cylinders	3
Displacement	1.496 litres

ELECTRICAL SYSTEM


Voltage	12 V
Batteries	1 x 52 Ah

DIMENSIONS (mm)

(with 1170 mm dipperstick)

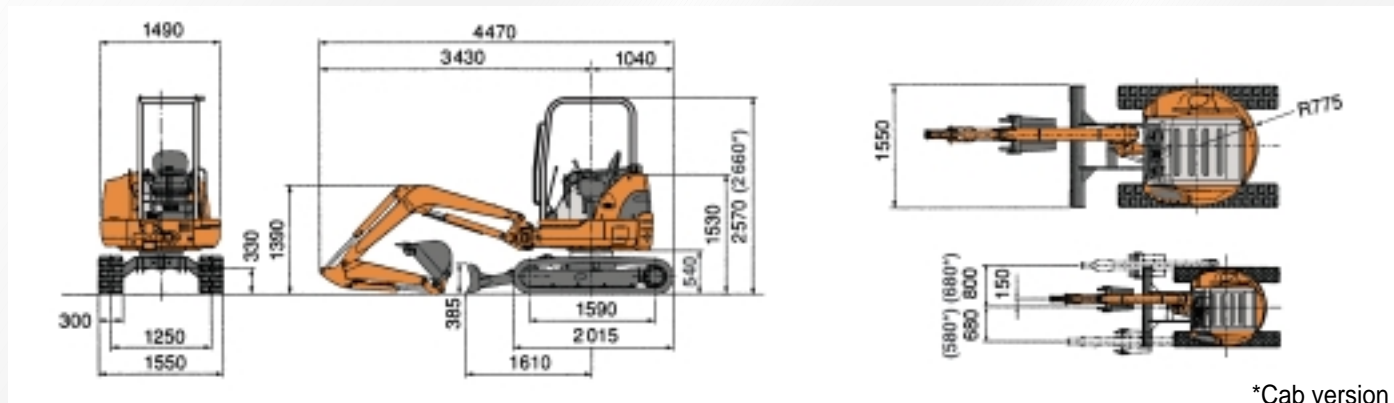

*Cab version

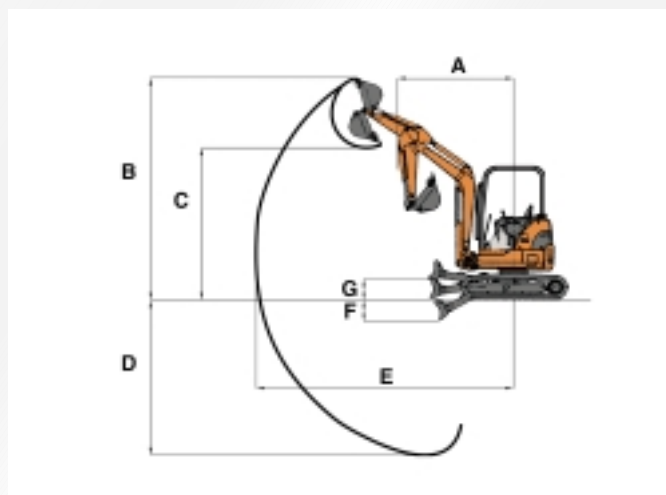

DIGGING PERFORMANCE

Dipperstick	mm	1170	
		cab	canopy
A	mm	2160	2160
B	mm	4400	4400
C	mm	3010	3010
D	mm	2850	2850
E	mm	4950	4950
F	mm	415	415
G	mm	385	385
Breakout force:			
- bucket	kN	27.5	
- dipperstick	kN	16.7	

BACKHOES

ISO 7451 capacity	Width	Width with side bits	Weight
m ³	mm	mm	Kg
0.055	300	350	61
0.065	350	400	64
0.08	400	450	67
0.09	450	500	71
0.10	500	550	74
0.11	550	600	78
0.13	600	650	82